

IIS-NVR16POE-2HD

16CH 2HDD NVR with 16CH PoE



Key Features


- Up to 16ch IP cameras access
- Up to 8MP resolution for live view and recording
- Intelligent analysis by NVR: Intrusion (support the accurate detection of vehicle and human)
- 2 SATA hard disk, up to 12TB for each HDD
- 1 RJ45 10/100/1000Mbps network interface
- 16ch POE ports
- Smart search & playback
- Support cloud upgrade

Specifications

Video Input	
IP Camera Input	16 Channel
Incoming Bandwidth	112 Mbps
Outgoing Bandwidth	112 Mbps
Video Output	
HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1, 16ch D1@30fps
Dual Stream	Support
Multi-screen Display	1/4/9/16
Recoding	
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
Alarm	
General Alarm	Motion Detection, Video Loss, Alarm in, Alarm out, IVS (by camera)
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Intelligent Analysis	Intrusion (support the accurate detection of vehicle and human)
Network	
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK, CGI

Storage	
HDD	2 SATA ports, up to 12TB for each HDD
Interface	
Network	1 x RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
PoE	16 Ports (IEEE802.3af), 128W
HDMI	1
VGA	1
Audio I/O	1/1
Alarm I/O	8/2
USB	3 ports (USB 2.0 × 3)
General	
Power Supply	AC100 ~ 240V
Power Consumption	< 15 W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	372 × 310.5 × 46.5 mm (16.65 × 12.2 × 2.2 inch)
Net Weight	2.75 kg (6.05 lb) without HDD

Dimensions (mm)

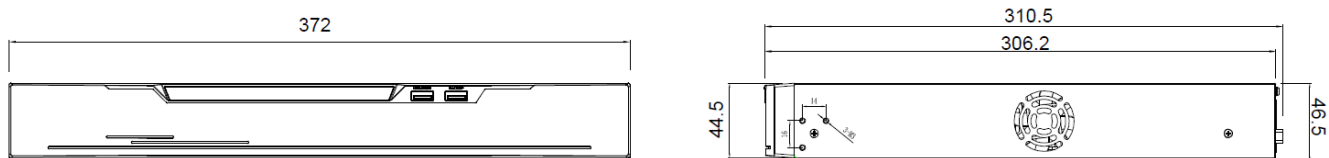

Rear Panel

